



# CTCLAMP

Clamp-On-Current Transformer



# CTCLAMP-D19 SERIES

Split-core current transformer for the measurement of AC currents from 1 to 200Amps. The Clamp-On CT easily snaps around the conductor and ideal for installation on electrical wiring. It has output in voltage form, 0.333V that is proportional to the RMS value of the primary current.

## » Benefits

- ☑ High isolation between primary and secondary circuits
- ☑ Compact design, Plug and Play
- ☑ Cost-Effective Solution for variety of applications
- ☑ High accuracy and durable
- ☑ UL Recognized
- ☑ CE and RoHS compliant

## » Applications



### Transformer Monitoring

Current measurement for Transformer Load current, Fan Motor Current, Pump Motor Current, OLTC Motor Current



### Switchgear/Breaker Monitoring

Current measurement for Phase Current, Motor Current, Heater Current (AC)



### Automation and Control

Current measurement for protection systems




## » Technical Specifications

Input Current	1 Amp to 200 Amp
Input Current Frequency	50 Hz to 400 Hz
Output at rated current	0.333 Volt AC
Accuracy	± 1% (at 10% to 130% of rated current)t
Phase angle	< 2 degrees measured at 50% rated current
Operating Temperature	-20 °C to + 85 °C
Storage Temperature	-20 °C to + 85 °C
Protection Degree	IP40
Sensor Cable Length	2m Twisted Pair (Default). Longer cables available on demand

## » Available Options

Model #	Measuring Current Rating (Conductor)
CLCLAMP-19-5A	Up to 5Amp
CLCLAMP-19-10A	Up to 10 Amp
CLCLAMP-19-30A	Up to 30 Amp
CLCLAMP-19-50A	Up to 50 Amp
CLCLAMP-19-70A	Up to 70 Amp
CLCLAMP-19-100A	Up to 100 Amp
CLCLAMP-19-150A	Up to 150 Amp
CLCLAMP-19-200A	Up to 200 Amp

## » Drawing and Dimensions

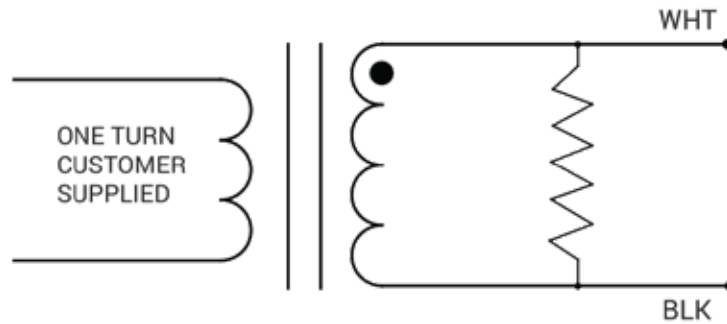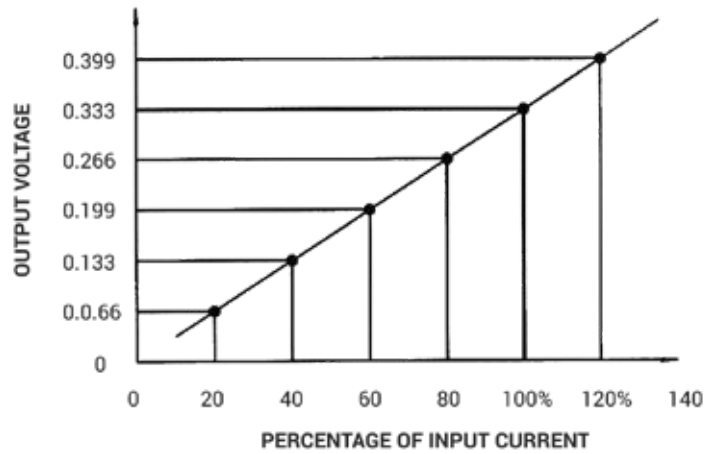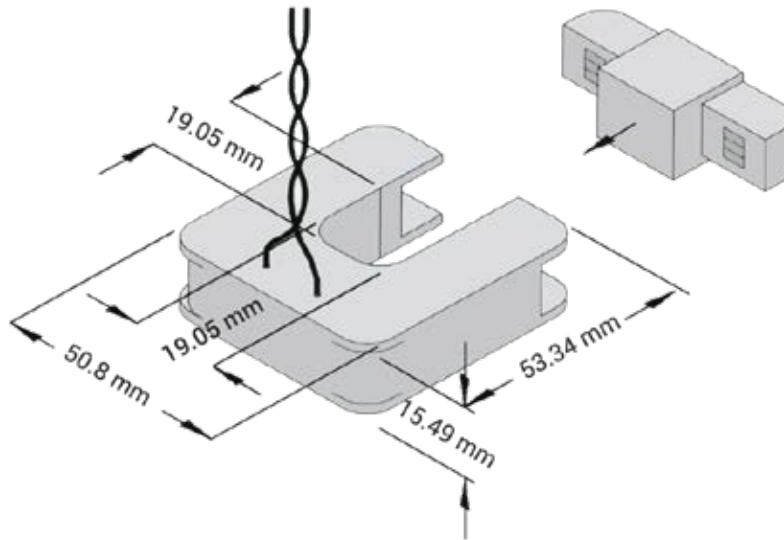

## CERTIFICATIONS



Canada

875 Bd. Charest O, Quebec, QC, Canada G1N 2C9

Asia Pacific | China | India | Middle East & Africa | Europe | North America | Latin America

+1-418-767-0111

[info@ruggedmonitoring.com](mailto:info@ruggedmonitoring.com)

[www.ruggedmonitoring.com](http://www.ruggedmonitoring.com)