



# O201

## Fiber Optic Temperature Monitoring with The Most Beneficial Fluorescence Technology

The most capable fiber optic  
temperature sensor to operate in  
a series of complex environments.



# O201 Fiber Optic Temperature Monitoring with most advanced



**RM's Fluorescence technology based O201 is designed with high accuracy, reliable for operation in extreme EMI, RFI, Microwave and high voltage environments. It is a multi-channel fiber optic temperature monitor with precision measurement for Original Equipment manufacturers. The O201 has a measuring range from -271 °C to +300 °C. The system is based on proven Fluorescence technology and designed for Plug and Play operation.**

The system offers complete immunity to RFI, EMI, microwave radiation, and High Voltages making it an optimal choice for environments where the limitations of conventional temperature sensors/ monitors impact usage in extreme conditions.

The O201 is designed to collect data and is easy to integrate into existing systems through serial communication like RS-485 or analog outputs like 0-10 V / 4-20 mA. The O201 supports Modbus, CANbus protocols and a system fault relay. The module is designed with capability to add additional application logic for customer specific applications. It is designed with the needs of Monitoring, Test platforms or Industrial Process monitoring integration needs. It has the data integration capability of multiple test platforms. Industry standard drivers available for a quick and easy connect to most popular laboratories software. The fluorescence based fiber optic temperature sensor is highly capable of operating in a series of complex environments such as strong electromagnetic and high voltage.

Rugged Monitoring designs and manufactures customized state of the art fiber optic sensor systems for the measurement of temperature, strain and other physical parameters.

**Our fiber optic temperature monitor with Fluorescence technology suits the requirement of measurements with difficult environmental conditions.**

## Features

- Rugged, Compact Design
- 1 to 8 Channels, Expandable
- Plug and Play
- Best in class EMI, ESD Immunity
- Software designed to be interfaced with other testing platforms

## Applications


- Electric Vehicle and Battery Testing
- Medical Equipment testing (MRI, PETSCAN, NMR)
- Commercial Grade Microwave Radiation
- Industrial process control and monitoring applications
- Chemical and process Industries Food and Beverage Processes
- Wood drying industry

## Benefits

- Robust and Reliable
- Offers a low-cost interrogator
- Suitable for OEM-type applications
- Sensors do not require any recalibration
- No shift over time, high stability and repeatability
- Robust packaging
- Each Monitor comes with a complete NIST calibration certificate
- Software designed for integration into test platforms
- Robust datalogging and Analytics
- Customizable according to customer specific applications
- Suitable for OEM-type applications.

## Ordering Code

**O201 = Original Equipment Module, 201 Series**

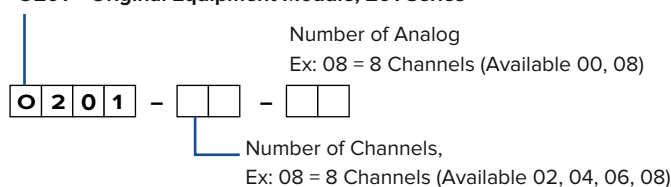

## Technical Specifications

Measurement Range	-80 °C to +300 °C (cryogenic 4 °K range optional)
Measurement range (Optional Range extensions)	Down to 4 °K / Up to +300 °C
Resolution	0.1°C
Accuracy	±1.0 °C (+/- 0.2 °C in relative temperature)
Number of Channels	1 - 8 Channels
Logging	1 sec interval on USB / Micro SD card
Config port	USB (to use with Rugged connect windows software)
Max # of Channels	Expandable to 256 Channels, Daisy chain up to 32 units (with Modbus, Canbus)
Communication Ports	RS-485 (RS-232 optional converter) with Modbus, CANbus
Power	24 VDC
Memory	MicroSD external memory slot (up to 2 TB)
Analog output module	Fully configurable eight 0-10 V / 4-20 mA module (Optional)
Dimensions	4.72" x 6.34" x 1.89" 120 x 161 x 48 mm
Scan rate	200 ms / channel (Optional: Faster scanning rates available)
Operating temp	-40 to 72 °C
Storage temp	-40 to 85 °C
Humidity	95% Non-Condensing
Relay	System Fault relay (5A)

# Rugged Connect & Web Based Software

## Key Features

The intuitive user interface of the software is designed to give quick access to the most relevant information with highest level of data security. The key features of rugged connect software are:

- Flexibility to compare and plot multiple parameters from modules for corelative analysis (or comparison) such as Temperature, Pressure, Vibration, Current etc.
- Real time data visualization and user configurable alarming
- Monitoring of signal strength for Fiber Optic signals for easy troubleshooting
- Easily customizable dashboards to meet different application requirements
- Flexibility to adjust data storage frequency and with user selectable summary feature (Minimum, Maximum and Average)
- Historic trending for user selectable duration
- Export of data into CSV, Excel, and JPEG format
- Flexibility to Enable / Disable Channels remotely using rugged connect software
- Support for multiple languages



## Integration with third party systems

Rugged connect provides easy to configure protocols for integration with third party data logger and systems.



It supports the following protocols for data input and output:

- Serial Protocols: CANBUS, Profinet, Modbus, DNP3.0, IEC 60870-5-101
- Ethernet (TCP/IP) Protocols: Modbus, DNP3.0, IEC 60870-5-104, IEC61850

### Third Party Drivers Available



LABVIEW



MATLAB



PYTHON

**Distributed Modules have CANBUS / MODBUS data output for high resolution data logging such as CAN Dataloggers.**

## Rugged Monitoring Services

Rugged Monitoring provides customization of sensors, monitors & software. In addition we offer on-site commissioning services, maintenance contracts and technical support to all customers worldwide.

## About Rugged Monitoring

Industry's leading team of asset condition monitoring experts with 100+ years of combined experience committed to delivering customizable solutions for challenging applications. We offer a range of reliable, high performance, customizable sensors and monitoring solutions that are immune to external influence.

## Our Presence Across the Globe

Head Office  Canada

1415 Frank-Carrel, Suite 230, Quebec, QC - G1N 4N7, CANADA

+1-418-767-0111

Asia Pacific | China | India | Middle East and Africa |

Europe | North America | Latin America



in f @ x v ruggedmon  
info@ruggedmonitoring.com  
www.ruggedmonitoring.com