

GSENS H2



Hydrogen sensors for transformer dissolved
gas monitoring using our proven DGA platform

GSENS H2

Hydrogen sensors for transformer dissolved gas monitoring using our proven DGA platform




Advance hydrogen sensing technology using palladium-nickel alloys with proprietary materials coating to protect the sensor, enabling it to measure hydrogen in oil or gas phase of power transformers and ancillary equipment.

This solid-state sensing element is hydrogen specific, inert to other transformer gases and can be immersed directly in the transformer oil during normal operation to measure hydrogen levels continuously. GSENS H2 platform has no consumable components or any degradation of the sensor, does not require carrier or calibration gases to maintain accuracy and has a theoretically unlimited useful life.

Key Features

GSENS H2 sensor is based on many years of research, experience and commercial success in various industries, including petroleum refineries, chemical production, nuclear power plants and fuel cells. GSENS H2 sensor is developed specifically for monitoring hydrogen in electric power transformers and other oil filled apparatus.

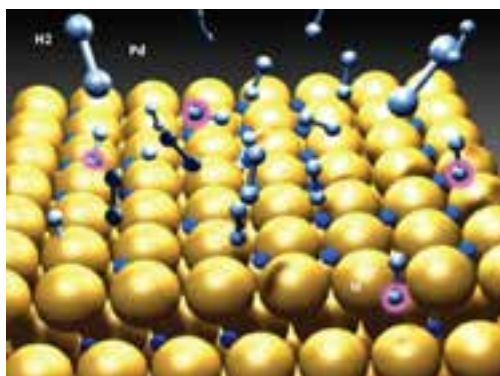


GSENS H2 sensors can be retrofitted onto active transformers without having to de-energize them. Unlike other technologies, GSENS H2 sensor technology does not suffer from signal saturation at high hydrogen concentrations. The sensor continuously measures oil temperature and provides an oil-temperature corrected hydrogen signal that can be used to activate relays and provide early warnings of a transformer failure.




Benefits

- Low cost solution for key incipient fault marker that is easy to install and maintain
- Operates immersed directly in transformer oil or headspace
- Continuous hydrogen monitoring reveals potential faults to ensure timely action and avoid downtime
- Reduced dependence on costly oil sample based DGA diagnostics
- No membrane, consumables, moving parts or reference gas

GSENS H2 Sensor Performance

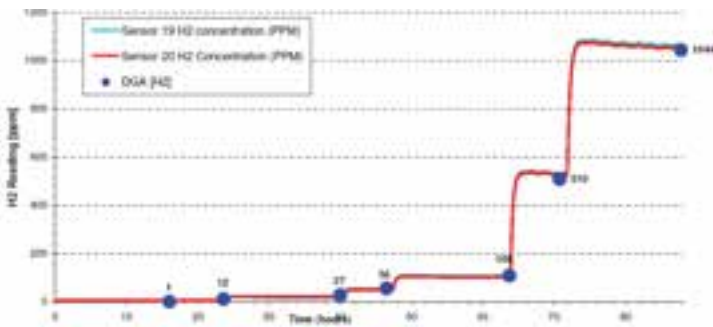

Sensor matches DGA readings in Oil Phase

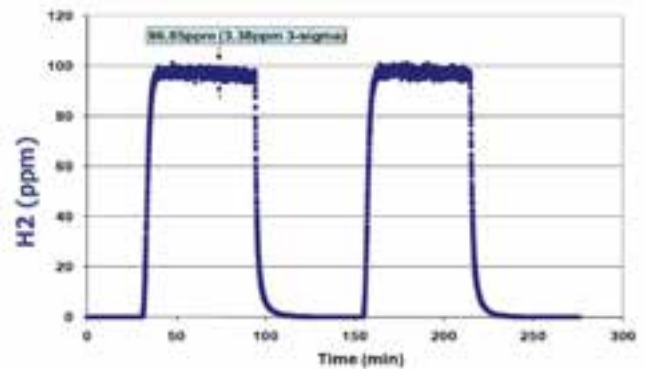

Sensor performance in Gas Phase

GSENS H2 Sensor for Transformer and Other Oil Filled Assets

- May be installed on New and Retrofit Applications
- Any class of oil filled transformer (Transmission /Distribution /Commercial /Industrial)
- Instrument Transformers
- Load Tap Changers and other oil-filled assets



Transformer Installation

Technical Specifications

Parameter	Oil Phase	Gas Phase
Measurement Accuracy Range	25 - 5,000 ppm	500 - 100,000 ppm
Accuracy ¹	20% of reading or 25 ppm [†]	20% of reading or 500 ppm
Repeatability ²	10% of reading or 15 ppm [†]	10% of reading or 300 ppm
Response Time	< 60 minutes	< 60 minutes
Operating Temperature (Ambient)	40°C to +70°C	40°C to +70°C
Storage Temperature	-40°C to +85°C	-40°C to +85°C
Oil Temperature Range ³	-40°C to +105°C	n/a
Data Log Storage	1 Year	1 Year
Cross-sensitivity to H ₂ O, CO ₂ , C ₂ H ₂ , C ₂ H ₄ , CO, etc.	<1%	<1%
Serial Communications	RS485, MODBUS RTU	RS485, MODBUS RTU
Power Supply	9-48 VDC, 10 Watt	9-48 VDC, 10 Watt

[†]whichever is greater

Physical Specifications

Wetted Materials

316SS, 40% mineral filled Nylon, polyimide, glass

Sealing

Hermetic glass-to-metal feedthrough, Buna-N gaskets

Housing

Hard Anodized 6061 Aluminum

DIMENSIONS (inches)



Ratings

CE Mark (IEC 61000)
ROHS 2011/65/EU compliant
EMC/RFI and Other Electrical Certification

- IEC 55022 IFCC Part 15
- IEC 55024
- IEC 55011
- IEC 61000-4-2 through 61000-4-6, and 61000-4-8
- IEC 61010-1
- IEC 60255-5
- IEC 61326

Ingress Protection

IP68; 25 feet water for 14 days
(IEC 60529)

Vibration

3-axis Sinusoidal, Wideband and Random
[Simulated Long-Life] (IEC 60068-2-6 table C.2, IEC 60068-2-64 paragraph A.2, category no. 2, IEC 61373: 2010 Cat 1B section 9)
Shock: 30g, shock duration 18ms (IEC 60068-2-27)

Asset Monitoring : Enterprise Architecture


Compatible with Rugged Monitoring Enterprise Solution

UI/UX



- Data Layer
- Analytics
- User Interface
- Custom Dashboards
- Reporting
- Email/SMS Notifications

RM EYE

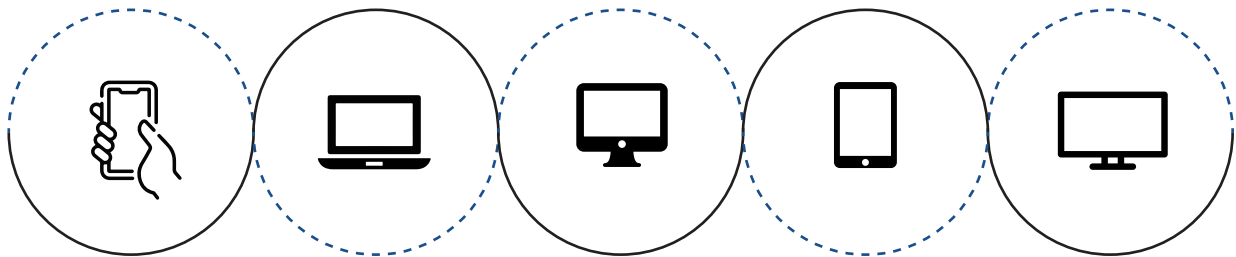

Private Cloud (Customer Cloud),
Rugged Monitoring Cloud

IEC 60870-104

IEC 61850

FTP/SFTP

- XML, JSON

- CSV, COMTRADE



Data Collection

ODBC


MODBUS

DNP 3.0

HTTPS

MQTT

Asset Data

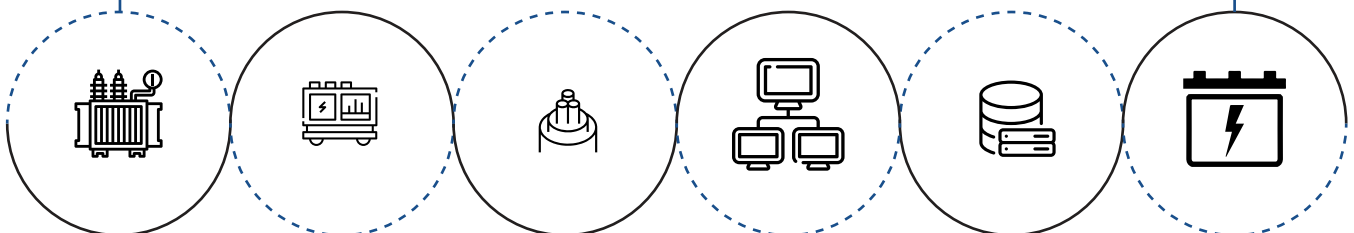

Transformer
Monitoring
System

Switchgear
Monitoring
System

Power Cable
Monitoring
System

- Offline Test Results
- Inspection Records
- Name Plate

- Historian
- CMMS
- SCADA/ DCS

Power Electronics
(Battery, UPS,
VFD, Relay)

Why Customers Choose Us?

RM solution, the trusted monitoring solution for over 10000+ assets across 50+ countries. We are a leading High Value Electrical Asset Monitoring Company integrating fibre optic technology to the assets.



Attention to Detail

It's our attention to the small stuff, scheduling of timelines and keen project management that makes us stand out from the rest.



A plan for Success

Our Customers are well satisfied with the advisory services that we offer to help them with best in class technological performance and a long durable life.




Experts only

We bring in our diversified experienced team with over 100+ years of experience in Asset Monitoring



Meeting Deadlines

Work with us, and you'll work with seasoned professionals – vigilant of deadlines, and committed to exceeding client expectations.



Money Matters

We protect you against currency fluctuation with competitive and fair market prices



Rugged Monitoring Services

Rugged Monitoring provides customization of sensors, monitors & software. In addition we offer on-site commissioning services, maintenance contracts and technical support to all customers worldwide.

About Rugged Monitoring

Industry's leading team of asset condition monitoring experts with 100+ years of combined experience committed to delivering customizable solutions for challenging applications. We offer a range of reliable, high performance, customizable sensors and monitoring solutions that are immune to external influence.

Certification



ISO 9001



ISO 14001



ISO 45001/
OHSAS 18000



Lloyd's
Register



ATEX
Certification

Our Presence Across the Globe



Head Office



1415 Frank-Carrel, Suite
230, Quebec, QC - G1N
4N7, CANADA

+1-418-767-0111

Asia Pacific | China | India | Middle East and Africa | Europe | North America | Latin America



in f @ t v ruggedmon

info@ruggedmonitoring.com

www.ruggedmonitoring.com

©2024 Rugged Monitoring Company. All rights reserved. Information subject to change without notice. All trademarks are properties of their respective companies, as noted herein.