




HPM601-C

High Frequency Partial Discharge
Monitor-Continuous

HPM601-C

Safeguarding HV Assets with Cutting-Edge PD Monitoring

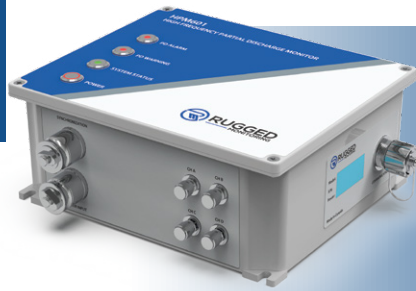

The HPM601-C delivers continuous high-frequency partial discharge (PD) monitoring for HV assets. Its compact and advanced design ensures accurate detection of insulation defects and seamless integration with industry protocols.

HPM601-C is Rugged Monitoring's highly sensitive PD monitoring solution that helps identify and record high-frequency (HF) signals to assess insulation degradation in real time. By providing timely alerts about possible faults, the edge device allows for proactive measures prior to any complete electrical asset breakdown. It also features advanced capabilities such as transient overvoltage protection, configurable band-pass filters, and a wide sampling rate, making it suitable for online testing and monitoring.

The HPM601-C can autonomously gather and store data from multiple sensors (4, 8 channels). It is also adept at high-voltage (HV) commissioning for new and retrofit electrical assets. To ensure optimal sensitivity, the sensors must match the connected ports' HF characteristics. Thus, Rugged Monitoring also offers customized sensor design and calibration services, adhering to relevant standards via vigorous testing.

Its user-friendly interface is housed in a durable polycarbonate resin traveling case and requires just an external mains supply for operations. The compact design ensures easy installation, while enhanced hardware and software capabilities allow for sensitive multi-channel PD measurements across various electrical equipment. The system supports integration with third-party protocols and can generate fast and reliable Phase Resolved Partial Discharge (PRPD) graphs, aiding in identifying PD types in HV assets. With integrated amplifiers and noise suppression, it is well-equipped for practical PD measurements even in noisy environments.

In addition to HPM601-C, Rugged Monitoring's PD Connect Software offers advanced analytics, customizable alarms and alerts, and user-intuitive dashboards to enhance operational efficiency and reduce downtime.

» Features

- Highly Sensitive PD Detection
- Transient Overvoltage Protection
- HV Commissioning & Retrofit Compatibility
- Robust and Portable Design
- Noise Suppression & PRPD Graphing
- Multi-Channel Data Acquisition

» Benefits

- Minimal interference and High Accuracy
- Cost-Effective Operation
- Improved Safety and Risk Mitigation
- Early Fault Detection & Prevention
- Optimized Maintenance Planning
- Seamless System Integration


» Applications

- HV AC testing (Resonant, VLF, OWTS)
- Multi-point PD monitoring
- Power Cables
- Reactors
- Switchgear - AIS, GIS
- Power Transformers

» Technical Specifications


| | |
|--------------------------------|--|
| Sampling Rate | 250 MS/s (For each channel separately) |
| HF Frequency Range | 0.01 - 100MHz |
| No. of Channels | 4 No's (Simultaneous acquisition) or 8 No's Option available |
| HF Amplitude Range | 1mV to 2000mV |
| HF Noise Elimination | Software controllable band-pass filter |
| Communication Protocols | Ethernet Copper-RJ45. Proprietary TCP/IP, Modbus, MQTT, IEC61850 |
| PD Measurement Types | IEC 60270 |
| | HF and VHF |
| | HVAC |
| | Acoustic |
| Power Rating | 50W |
| IP Rating | IP 65 |
| Synchronization | <ol style="list-style-type: none"> 1. Internal Raw Power Supply 2. External with Rogowski Coil, Electrical Field Sensor 3. 110V VT Signal |
| Compatible Sensors | HSENS-H, HSENS-T, HSENS-CC, BSENS, ASENS, any HF sensor range upto 100 MHz |
| Ambient Temperature | -30°C to +60°C |
| Storage Temperature | -40°C to +85°C |
| Dimensions | 420.6 mm(L) x 352.5 mm(W) x 153.25mm(H) |
| Software | Web Based software OR Enterprise level (RMEYE) |
| Asset Types Monitored | Transformers, Reactors |
| | Switchgear AIS and GIS |
| | Power Cables |

» Product Drawing

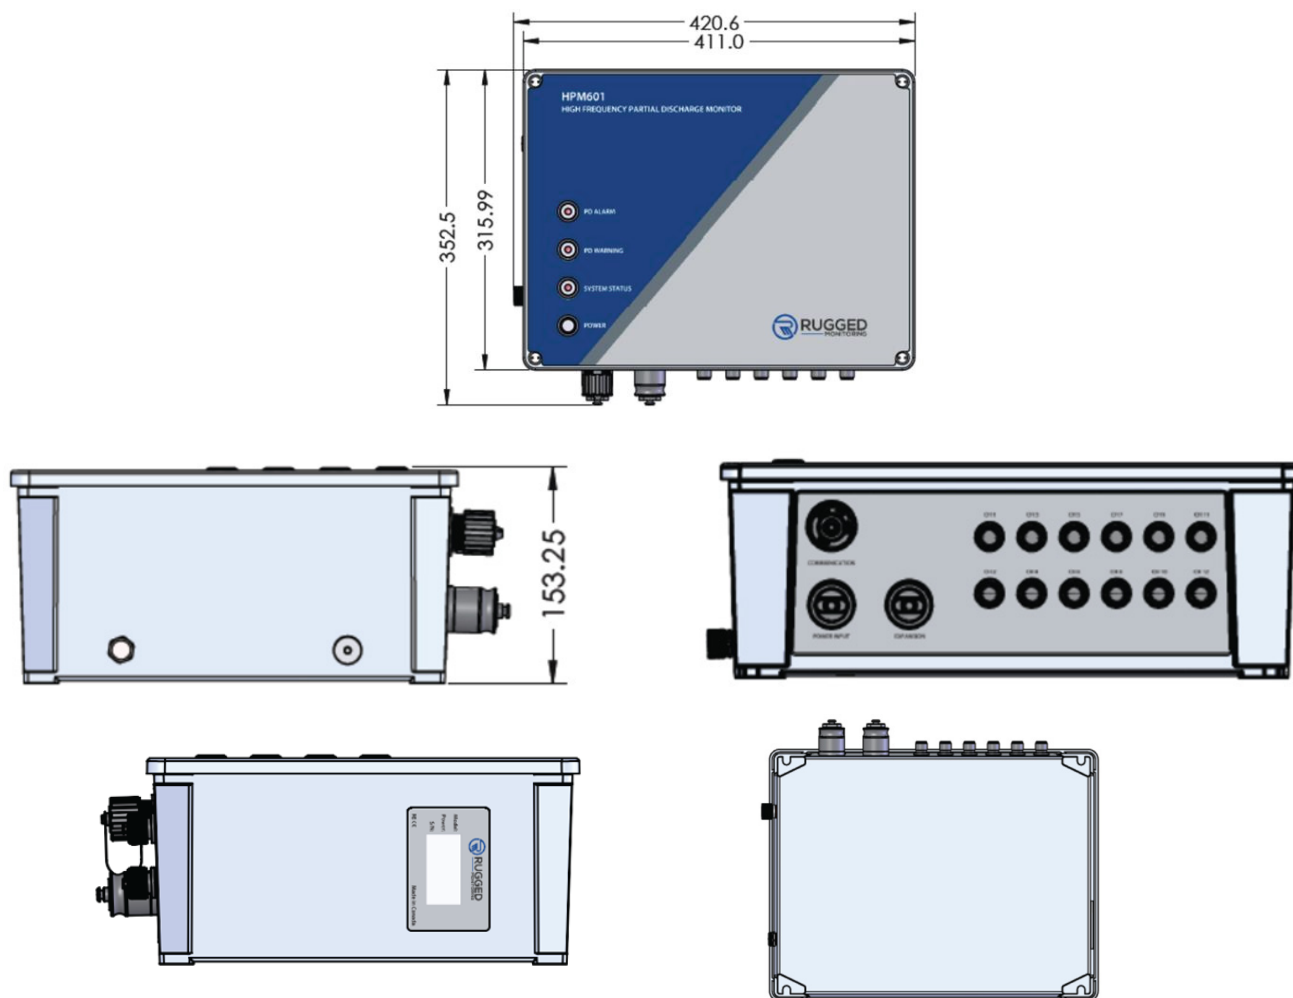

Note: All dimensions are in millimeters (mm)

» Ordering Code

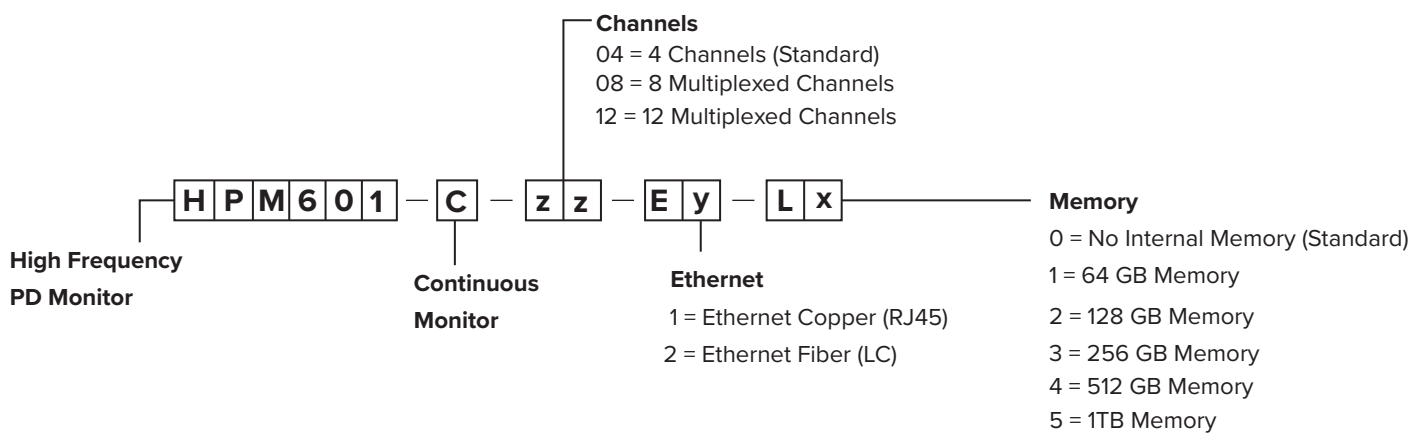

CERTIFICATIONS



Canada

1415 Frank-Carrel, Sulte , 230, Quebec, QC-G1N , 4N7, CANADA

Asia Pacific | China | India | Middle East & Africa | Europe | North America | Latin America

+1-418-767-0111

info@ruggedmonitoring.com

www.ruggedmonitoring.com